




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04B 7/005	A1	(11) International Publication Number: WO 00/18033 (43) International Publication Date: 30 March 2000 (30.03.00)
<p>(21) International Application Number: PCT/SE99/01607</p> <p>(22) International Filing Date: 14 September 1999 (14.09.99)</p> <p>(30) Priority Data: 09/156,695 18 September 1998 (18.09.98) US</p> <p>(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).</p> <p>(72) Inventors: MATTISSON, Sven; Majorsvägen 1, S-237 32 Bjärred (SE). HAARTSEN, Jaap; Bruchterweg 81, NL-7772 BG Hardenberg (NL).</p> <p>(74) Agent: ERICSSON MOBILE COMMUNICATIONS AB; IPR Dept., S-221 83 Lund (SE).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>	

(54) Title: AUTOMATIC POWER CONTROL IN UNCOORDINATED FREQUENCY-HOPPING RADIO SYSTEMS

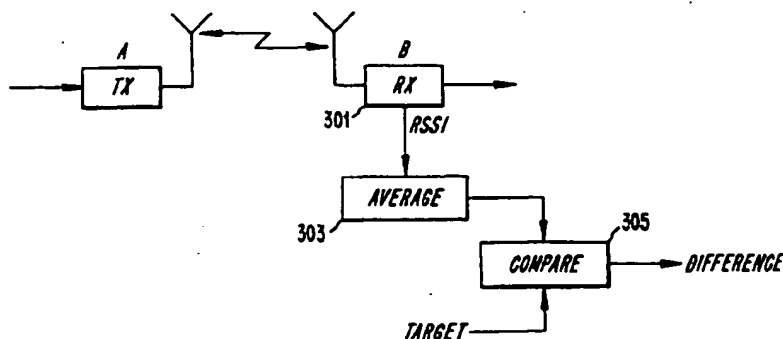

(57) Abstract

Transmission power in a frequency-hopping radio system that transmits packets from a sending radio unit to a receiving radio unit, wherein each packet includes an address designating the receiving radio unit, is controlled by measuring received signal strength of packets whose addresses were successfully received in the receiving radio unit, regardless of whether other portions of the respective packets were successfully received. An average signal strength value is generated from the received signal strength measurements. The mathematical difference between the average signal strength value and a target value associated with the receiving radio unit is then determined and used as a basis for deciding whether to send a power control message from the receiving radio unit to the sending radio unit. In order to provide a hysteresis in the power control process, a power control message is sent from the receiving radio unit to the sending radio unit if the mathematical difference is greater than a first decision boundary, or if the mathematical difference is less than a second decision boundary. The power control message may itself include the mathematical difference which, when received by the sending radio unit, is used as a basis for determining a transmission power level adjustment amount. The target value, against which the average signal strength value is compared, may be based on the receiver sensitivity adjusted to account for implementation losses and other inaccuracies.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

AUTOMATIC POWER CONTROL IN UNCOORDINATED FREQUENCY-HOPPING RADIO SYSTEMS

BACKGROUND

The invention relates to radio systems that apply frequency hopping
5 (FH) spread spectrum techniques. More particularly, the invention relates to power
control techniques for use in radio systems in which several, uncoordinated and non-
synchronized FH systems cover the same area.

In the past few decades, progress in radio and Very Large Scale
Integration (VLSI) technology has fostered widespread use of radio communications in
10 consumer applications. Portable devices, such as mobile radios, can now be produced
having acceptable cost, size and power consumption characteristics.

Although wireless technology is today focused mainly on voice
communications (e.g., with respect to handheld radios), this field will likely expand in
the near future to provide greater information flow to and from other types of nomadic
15 devices and fixed devices. More specifically, it is likely that further advances in
technology will provide very inexpensive radio equipment that can be easily integrated
into many devices. This will reduce the number of cables currently used. For
example, radio communication can eliminate or reduce the number of cables used to
connect master devices with their respective peripherals.

20 The aforementioned radio communications will require an unlicensed
band with sufficient capacity to allow for high data rate transmissions. A suitable band
is the Industrial, Scientific and Medical (ISM) band at 2.4 GHz, which is globally
available. The band provides 83.5 MHz of radio spectrum.

To allow different radio networks to share the same radio medium
25 without coordination, signal spreading is usually applied. In fact, the FCC in the
United States currently requires radio equipment operating in the 2.4 GHz band to
apply some form of spreading when the transmit power exceeds about 0 dBm.
Spreading can be either at the symbol level by applying direct-sequence spread
spectrum or at the channel level by applying frequency hopping (FH) spread spectrum.

The latter is attractive for the radio applications mentioned above since it more readily allows the use of cost-effective radios.

The range of a radio link is generally determined by the transmit power of the sender in conjunction with the receiver sensitivity of the recipient, the receiver sensitivity being that received signal level for which acceptable reception is just possible. The receiver sensitivity is normally determined by the noise characteristics in the receiver which in turn depend on the bandwidth and allowable supply currents. Generally, the receiver sensitivity of a radio is fixed at the time of manufacturing. In contrast, the transmit (TX) power is usually a variable. Apart from hardware and power supply limitations, the maximum TX power is limited by government regulations. Even in an unlicensed band like the 2.4 GHz ISM band, maximum TX power is limited to 1 W. However, in the type of applications mentioned above, it is unnecessary to fix the TX power at its maximum. Rather, the TX power is regulated down such that the recipient receives a just sufficient amount of signal power for acceptable link quality. Reducing the TX power to the level just needed will reduce power consumption, thereby not only extending battery life, but also reducing interference. Reduction of interference is especially important if many uncoordinated radio networks share the same medium.

The TX power should always be controlled to an acceptable minimum in order to maintain acceptable link quality. In the type of applications mentioned above, the communicating radio units are peer units, and each seeks to reduce its TX power as much as possible. This results in a closed-loop power control algorithm, in which the recipient informs the sender to increase or decrease its TX power depending on the receive conditions. Such an automatic power control scheme has been described by G.H. Flammer, in U.S. Patent No. 5,465,398, issued Nov. 7, 1995 ("Automatic Power Level Control of a Packet Communication Link"). This patent describes a procedure in which the TX power of the sender is regulated based on Received Signal Strength Indication (RSSI) in the recipient. In accordance with the described conventional technique, power control is relative in that the lowest RSSI value of a successfully-received packet is used as a reference value. "Successful" in this context means that the entire packet, including the payload data, has been received without error. For those packets that are (successfully) received with a higher RSSI level, the difference

between the higher RSSI level and the reference value is determined and communicated to the sender, which can then reduce its TX power. Packets that are not successfully received are retransmitted at a higher TX power.

The problem with this scheme is that it does not distinguish between
5 range and interference. The failure to successfully receive a packet can be attributed either to the signal level being too low, or to the interference level being too high. This is especially true in a situation in which many uncoordinated radio systems cover the same area: these systems will interfere with each other and packets will be lost due to collisions of different radio transmissions. Were an automatic power control
10 strategy such as that described by Flammer to be employed under these conditions, all radio units would increase their power, which would only worsen the situation because the coverage area and therefore the number of mutual interferers would increase. In fact, the systems may become unstable. In an unlicensed band like the ISM band where operation of the radio units is uncoordinated and the radio units operate
15 independently of each other, a power control strategy based on interference will result in an unfair domination of that system having the largest TX power.

An additional problem relates to the bursty interference conditions in FH systems: as the different systems hop uncoordinated through the spectrum, the interference only occurs if they happen, by chance, to use the same hop frequency at
20 the same time. Due to the hopping, the interference conditions change for every hop. If the system hops at the packet rate, adjusting the power based on the successful reception of a packet is not very stable.

SUMMARY

The foregoing and other objects are achieved in transmission power
25 control methods and apparatuses for use in a frequency-hopping radio system that transmits packets from a sending radio unit to a receiving radio unit, wherein each packet includes an address designating the receiving radio unit. In accordance with one aspect of the invention, the received signal strength of packets whose addresses were successfully received in the receiving radio unit is measured, regardless of whether
30 other portions of the respective packets were successfully received; and an average signal strength value is generated from the received signal strength measurements. A

mathematical difference between the average signal strength value and a target value associated with the receiving radio unit is then determined, and used as a basis for deciding whether to send a power control message from the receiving radio unit to the sending radio unit.

5 In another aspect of the invention, using the mathematical difference as a basis for deciding whether to send a power control message from the receiving radio unit to the sending radio unit comprises sending a power control message from the receiving radio unit to the sending radio unit if the mathematical difference is greater than a first decision boundary or less than a second decision boundary.

10 In yet another aspect of the invention, the power control message may include the mathematical difference.

 In still another aspect of the invention, the power control message is received in the sending radio unit, which then adjusts its transmission power level unit by an amount based on the mathematical difference.

15 In yet another aspect of the invention, adjusting the transmission power level in the sending radio unit by an amount based on the mathematical difference includes determining whether the amount based on the mathematical difference would cause an adjusted transmission power level to exceed a predefined maximum transmission power level. If the amount based on the mathematical difference would
20 cause the adjusted transmission power level to exceed the predefined maximum transmission power level, then the transmission power level in the sending radio unit is adjusted to be no more than the predefined maximum transmission power level.

 In still another aspect of the invention, when the sending radio unit is at the predefined maximum TX power level, a control message is sent from the sending
25 radio unit to the receiving radio unit informing that a maximum transmission power level has been reached.

 In yet another aspect of the invention, the receiving radio unit responds to the control message from the sending radio unit informing that a maximum transmission power level has been reached, by sending no further power control
30 messages to the sending radio unit that instruct the sending radio unit to further increase its transmission power level.

In still another aspect of the invention, adjusting the transmission power level in the sending radio unit by an amount based on the mathematical difference includes determining whether the amount based on the mathematical difference would cause an adjusted transmission power level to fall below a predefined minimum
5 transmission power level. If the amount based on the mathematical difference would cause the adjusted transmission power level to fall below the predefined minimum transmission power level, then the transmission power level in the sending radio unit is adjusted to be no less than the predefined minimum transmission power level.

In yet another aspect of the invention, when the sending radio unit is at
10 the predefined minimum TX power level, a control message is sent from the sending radio unit to the receiving radio unit informing that the minimum transmission power level has been reached.

In still another aspect of the invention, the receiving radio unit responds to the control message from the sending radio unit informing that a minimum
15 transmission power level has been reached, by sending no further power control messages to the sending radio unit that instruct the sending radio unit to further decrease its transmission power level.

In yet another aspect of the invention, the target value associated with the receiving radio unit is based on the receiver sensitivity alone, or adjusted to account
20 for implementation losses and other inaccuracies.

In still another aspect of the invention, generating the average signal strength value from the received signal strength measurements may include averaging signal strength values from the received signal strength measurements over a period of time extending over at least two frequency hops.

25 In yet another aspect of the invention, the power control message is transmitted on a control channel established between the receiving radio unit and the sending radio unit. Alternatively, it may be included in a return packet that is transmitted from the receiving radio unit to the sending radio unit.

In still another aspect of the invention, a highest permissible transmit
30 power level is always used to send the power control message from the receiving radio unit to the sending radio unit. Alternatively, a first transmit power level is initially used to send the power control message from the receiving radio unit to the sending

radio unit. The power control message transmit power level is then gradually increased from the first transmit power level to successively higher levels until a reception signal strength level at the receiving radio unit has reached a predefined acceptable level.

BRIEF DESCRIPTION OF THE DRAWINGS

5 The objects and advantages of the invention will be understood by reading the following detailed description in conjunction with the drawings in which:

FIG. 1 depicts an interference scenario involving four radio units employing high transmission power levels;

10 FIG. 2 depicts an interference scenario involving four radio units employing low transmission power levels;

FIG. 3 is a block diagram depicting circuits at sender and recipient radio units for maintaining a power control loop in accordance with one aspect of the invention;

15 FIG. 4 is a flow diagram of a power control procedure performed at the recipient radio unit in accordance with one aspect of the invention; and

FIG. 5 is a flow diagram of power control procedure performed at the sender radio unit in accordance with one aspect of the invention.

DETAILED DESCRIPTION

20 The various features of the invention will now be described with respect to the figures, in which like parts are identified with the same reference characters.

25 FIG. 1 depicts two independent frequency hopping (FH) radio links 101, 103 operating in the vicinity of one another. Exemplary systems that utilizes such links are described in U.S. Patent Application No. 08/932,911, filed on September 17, 1997 (Haartsen); and U.S. Patent Application No. 08/932,244, filed on September 17, 1997 (Haartsen), the entire disclosures of which are hereby incorporated by reference herein in their entireties. The coverage range of each radio unit is indicated by a dashed circle. Units A and B communicate according to one FH scheme, while units C and D communicate according to another FH scheme. The two radio links 101, 103 are uncoordinated and occasionally make use of the same hop channel. Depending on the
30 relative distances between the various units A, B, C, D, one or both transmissions may

fail in that case. In the case illustrated in FIG. 1, the coverage areas are such that collisions will indeed occur. Units C and D are in the coverage range of units A and B, and vice versa; A and B will therefore interfere with C and D and vice versa.

FIG. 2 illustrates a case in which the TX powers of the radio units have
5 been reduced, resulting in the smaller coverage areas depicted by the dotted lines in the figure. In this case, the signal strengths of the two systems are insufficient to disturb each other's intended received signals, and collisions will not occur even if the two links use the same hop channel simultaneously. This concept is generally used in cellular systems where channels are reused at geographic locations spaced sufficiently
10 apart so that the mutual interference is too weak to disturb the intended signals.

It is clear from FIGS. 1 and 2 that the TX power should always be set as low as possible since this will increase overall capacity (reuse gain). In addition, it will reduce power consumption and thus extend battery life. However, the strategy for determining the power level control should not be based on the interference level
15 experienced, because such a strategy can result in both transceiver pairs increasing their power. When this happens, interference is not reduced, and power consumption is increased.

In accordance with one aspect of the invention, power control is based on the absolute signal level received at each recipient. The TX power of the sending
20 unit is adjusted to a level such that the received signal level is sufficiently large enough to overcome the noise generated in the receiver (receiver sensitivity) plus some margin.

FIG. 3 is a block diagram depicting circuits at sender and recipient radio units for maintaining a power control loop in accordance with one aspect of the invention. A closed-loop power control strategy is used, in which, in one respect, unit
25 A tells unit B what TX power to use based on signal strength measurements taken in unit A; and conversely, unit B tells unit A what TX power to use based on signal strength measurements taken in unit B. In order to facilitate an understanding of the invention, FIG. 3 depicts only those components involved in the procedure for controlling unit A's TX power. It will be readily understood that for controlling unit
30 B's TX power, the same components and strategies would be employed, but with the roles of unit A and unit B being reversed.

Looking now at FIG. 3, unit B includes an RSSI measurement unit 301 that generates an RSSI value based on packets received from unit A. Each transmitted packet includes an address portion (e.g., in a header portion of the packet) that designates the intended recipient which, in this example, is unit B. Preferably, the only
5 packets for which an RSSI measurement is made are those packets whose addresses are successfully received, regardless of whether other portions of the respective packets are successfully received. This is done in order to avoid having unit B regulate the power of unit A using packets erroneously received from a third unit (e.g., a nearby unit C). To facilitate a determination of whether a packet's address has been correctly received,
10 forward error correction codes, such as header redundancy checks (HECs, which are the same as cyclic redundancy checks, or CRCs) may be (and typically are) added to the packet.

By only requiring that the address portion of the packet be successfully received, and not requiring that any other portion of the packet be successfully
15 received, this aspect of the invention achieves an advantage in those situations in which the address, but not the packet payload (e.g., data) has been successfully received. (This can easily happen since packet headers are typically shorter than the payload portion, and include more forward error correction coding.) The advantage arises because by knowing at least that the packet was intended to be received by a particular
20 receiving radio unit, that unit can still make an RSSI measurement on the packet, thereby enabling the power control mechanism to continue functioning (possibly increasing the transmit power level so that subsequent packet payloads will be received with fewer errors). By contrast, conventional techniques that make measurements only on those packets that were successfully received in their entirety, can break down when
25 erosion of the transmission link between the sending and receiving radio units causes no packets to be successfully received. In this case, no signal strength measurements are made at all, so no power controls are generated and no closed-loop power control can be sustained in conventional systems.

Returning now to a discussion of FIG. 3, the packets are assumed to be
30 sent on different hop channels, as is customary in FH radio systems. Different systems can have different relationships between the amount of time required to transmit one packet and the frequency hop dwell time (i.e., the amount of time that the FH radio

systems spends communicating over any one of the various frequencies in the hop sequence). For example, the hop dwell time can be just long enough to permit the transmission of just one packet. Alternatively, the hop dwell time may be long enough to permit the transmission of two or more packets. In a preferred embodiment, unit B includes averaging circuitry 303 that accumulates the RSSI of packets received over many hops on different frequencies (e.g., over at least two, and in some embodiments all of the hops in a hop sequence), and determines an average RSSI. The averaging circuitry 303 may alternatively be hardwired components, programmed processing components, or a combination of both.

In another aspect of the invention, unit B further includes a comparator 305 that compares the average value determined in unit B with a target value, and determines therefrom a mathematical difference. In alternative embodiments, the mathematical difference can be represented by signals of any resolution, from 1 bit and higher, depending on the design of the overall system, and can represent positive as well as negative values. The target value used in the comparison can, for example, be the receiver sensitivity of unit B. In some embodiments, it may be advantageous to add a margin amount to the receiver sensitivity in order to determine the target value. Note that the receiver sensitivity may vary from unit to unit. More advanced units may have a lower receiver sensitivity and therefore require less TX power for the same range. In alternative embodiments, the target value can be based on parameters that are unrelated to receiver sensitivity.

The mathematical difference between the average RSSI value and the target value is then sent back to the sender (unit A in this example). This can, for example, be accomplished via a special control channel between unit A and B.

Alternatively, the mathematical difference value may be piggy backed (i.e., included) in the return packet sent from unit B to unit A. If the mathematical difference is positive, the measured RSSI value is larger than that which is required for the current distance between units A and B. In this case, unit A may reduce its TX power. If the mathematical difference is negative, then unit A may increase its TX power. Note that unit A only adjusts its current TX power level by an amount based on the received mathematical difference value. The particular relationship between the adjustment amount and the mathematical difference value will be system dependent.

Consequently, a full discussion of how to determine the adjustment amount based on the received mathematical difference value is beyond the scope of this disclosure. In general, unit B will only request a change in TX power when the mathematical difference has exceeded a certain margin. In this way a hysteresis results that prevents
5 unit B from requesting small up and down steps continuously. Such a situation would result in a rather large overhead if explicit power messages are used.

Flow diagrams of the power control procedures performed at the recipient and sender are respectively shown in FIGS. 4 and 5. Looking first at FIG. 4, the RSSI of those packets whose addresses were successfully received is measured (step
10 401). These RSSI values are then averaged over a period of time that preferably extends over a large number of hop frequencies (step 403). The average RSSI value is then compared with a target value (e.g., by subtracting one from the other) in order to obtain a mathematical difference value (step 405). In some embodiments, the mathematical difference value may, at this point, be used directly to determine whether
15 an adjustment in TX power should be made (i.e., based on whether the mathematical difference is equal to zero).

However, in preferred embodiments, a hysteresis is created by utilizing the decision boundaries Δa and Δb in a decision step (step 407). Specifically, if the mathematical difference value is alternatively greater than the boundary Δa or less than
20 the boundary Δb , then a power message including the mathematical difference value is sent to the sending unit (step 409). However, if neither of these test conditions is true, then no power message is transmitted. In either case, the entire process begins again at step 401 with the measurement of the RSSI for newly successfully received packets.

Looking now at FIG. 5, step 501 represents conventional processing that
25 is performed by a radio unit. Such processing, of course, depends on the nature of the radio unit (e.g., whether it is wireless processing equipment, or some other type of equipment), and a discussion of this processing is outside the scope of this disclosure.

At some point, a determination is made as to whether a new power message has been received (step 503). If not, processing resumes at step 501.

30 However, if a new power message has been received, then the current TX level is adjusted by an amount determined by the contents of the new power message (step 507). In some embodiments, TX level cannot be adjusted above

predefined maximum and/or below predefined minimum levels. In such cases, the adjustment step 507 includes a test to see if the intended adjustment would cause the adjusted TX level to either exceed the predefined maximum level, or fall below the predefined minimum level. In such cases, no adjustment beyond these limits is made.

- 5 In such cases, it is preferable (although not required in all embodiments) for the sending radio unit to send a control message to the receiving radio unit informing that the maximum/minimum TX power level has been achieved. In response, the receiving radio unit should send no further power control messages that attempt to cause the sending radio unit to adjust the TX power level beyond the predefined limits.
- 10 Specifically, when the receiving radio unit learns that the sending radio unit is at the predefined maximum TX power level, it will send no further control messages that attempt to further increase the TX power level beyond the predefined maximum TX power level. Similarly, when the receiving radio unit learns that the sending radio unit is at the predefined minimum TX power level, it will send no further control messages
- 15 that attempt to further decrease the TX power level to a level that is lower than the predefined minimum TX power level.

Following the adjustment step 507, processing proceeds as usual (step 501).

- The above-described procedure establishes a closed loop between sender
- 20 and recipient for controlling the TX power of the sender. This procedure fails as soon as the loop is "broken". For example, if the link attenuation were suddenly to increase due to an object between sender and recipient, the recipient would have no ability to instruct the sender to increase its TX power. To account for this situation, two alternative solutions may be applied. In one embodiment, the control packet carrying
- 25 the power control message is always sent at the highest allowable TX power. In an alternative embodiment, the power of the control packet carrying the power control message starts at a first power level. If the reception level at the receiving radio unit is not increased, this is presumably due to the sending unit not receiving the power control message. Therefore, starting at the first power level, the power of the control
- 30 packet carrying the power control message is gradually increased until the reception level at the receiving radio unit has reached a satisfying level again. Note that this

procedure is applied only for those packets that include power control messages. For all other messages, the other side has to request for the increase of TX power.

If a unit has several connections to different units (e.g., a master unit in communication with a number of slave units), it should support a power control loop to each unit independently. That is, the power of the packet transmission will depend on the distance and target reception value of each individual recipient. If a unit wants to send broadcast packets to all linked units, the broadcast message should either be sent at the maximum power level, or alternatively at the highest one of all of the various power levels required by the receiving units (i.e., the power level required by that unit having the weakest link between itself and the broadcasting unit).

The invention has been described with reference to a particular embodiment. However, it will be readily apparent to those skilled in the art that it is possible to embody the invention in specific forms other than those of the preferred embodiment described above. This may be done without departing from the spirit of the invention. The preferred embodiment is merely illustrative and should not be considered restrictive in any way. The scope of the invention is given by the appended claims, rather than the preceding description, and all variations and equivalents which fall within the range of the claims are intended to be embraced therein.

WHAT IS CLAIMED IS:

1. A method of controlling transmission power in a frequency-hopping radio system that transmits packets from a sending radio unit to a receiving radio unit, wherein each packet includes an address designating the receiving radio unit, the
5 method comprising the steps of:
 - measuring received signal strength of packets whose addresses were successfully received in the receiving radio unit, regardless of whether other portions of the respective packets were successfully received;
generating an average signal strength value from the received signal
10 strength measurements;
determining a mathematical difference between the average signal strength value and a target value associated with the receiving radio unit; and
using the mathematical difference as a basis for deciding whether to send a power control message from the receiving radio unit to the sending radio unit.
- 15 2. The method of claim 1, wherein the step of using the mathematical difference as a basis for deciding whether to send a power control message from the receiving radio unit to the sending radio unit comprises the steps of:
 - sending a power control message from the receiving radio unit to the sending radio unit if the mathematical difference is greater than a first decision
20 boundary; and
sending the power control message from the receiving radio unit to the sending radio unit if the mathematical difference is less than a second decision boundary.
3. The method of claim 1, wherein the power control message includes the
25 mathematical difference.
4. The method of claim 3, further comprising the steps of:
 - receiving the power control message in the sending radio unit; and
adjusting a transmission power level in the sending radio unit by an amount based on the mathematical difference.

5. The method of claim 4, wherein the step of adjusting the transmission power level in the sending radio unit by an amount based on the mathematical difference comprises:
- determining whether the amount based on the mathematical difference would cause an adjusted transmission power level to exceed a predefined maximum transmission power level;
- if the amount based on the mathematical difference would cause the adjusted transmission power level to exceed the predefined maximum transmission power level, then adjusting the transmission power level in the sending radio unit to be no more than the predefined maximum transmission power level.
6. The method of claim 5, further comprising the step of:
- sending a control message from the sending radio unit to the receiving radio unit informing that a maximum transmission power level has been reached.
7. The method of claim 6, further comprising the step of:
- in the receiving radio unit, in response to the control message from the sending radio unit informing that a maximum transmission power level has been reached, sending no further power control messages to the sending radio unit that instruct the sending radio unit to further increase its transmission power level.
8. The method of claim 4, wherein the step of adjusting the transmission power level in the sending radio unit by an amount based on the mathematical difference comprises:
- determining whether the amount based on the mathematical difference would cause an adjusted transmission power level to fall below a predefined minimum transmission power level;
- if the amount based on the mathematical difference would cause the adjusted transmission power level to fall below the predefined minimum transmission power level, then adjusting the transmission power level in the sending radio unit to be no less than the predefined minimum transmission power level.

9. The method of claim 8, further comprising the step of:
sending a control message from the sending radio unit to the receiving
radio unit informing that a minimum transmission power level has been reached.
10. The method of claim 9, further comprising the step of:
5 in the receiving radio unit, in response to the control message from the
sending radio unit informing that a minimum transmission power level has been
reached, sending no further power control messages to the sending radio unit that
instruct the sending radio unit to further decrease its transmission power level.
11. The method of claim 1, wherein the target value associated with the
10 receiving radio unit is based on the receiver sensitivity.
12. The method of claim 1, wherein the target value associated with the
receiving radio unit is based on the receiver sensitivity adjusted to account for
implementation losses and other inaccuracies.
13. The method of claim 1, wherein the step of generating the average signal
15 strength value from the received signal strength measurements comprises the step of:
averaging signal strength values from the received signal strength
measurements over a period of time extending over at least two frequency hops.
14. The method of claim 1, further comprising the step of:
when it is decided to send the power control message from the receiving
20 radio unit to the sending radio unit, sending the power control message on a control
channel established between the receiving radio unit and the sending radio unit.
15. The method of claim 1, further comprising the step of:
when it is decided to send the power control message from the receiving
radio unit to the sending radio unit, including the power control message in a return
25 packet that is transmitted from the receiving radio unit to the sending radio unit.

16. The method of claim 1, further comprising the step of:
when it is decided to send the power control message from the receiving radio unit to the sending radio unit, always using a highest permissible transmit power level to send the power control message from the receiving radio unit to the sending
5 radio unit.

17. The method of claim 1, further comprising the step of:
when it is decided to send the power control message from the receiving radio unit to the sending radio unit, initially using a first transmit power level to send the power control message from the receiving radio unit to the sending radio unit, and
10 then gradually increasing the power control message transmit power level from the first transmit power level to successively higher levels until a reception signal strength level at the receiving radio unit has reached a predefined acceptable level.

18. An apparatus for controlling transmission power in a frequency-hopping radio system that transmits packets from a sending radio unit to a receiving radio unit,
15 wherein each packet includes an address designating the receiving radio unit, the apparatus comprising:

means for measuring received signal strength of packets whose addresses were successfully received in the receiving radio unit, regardless of whether other portions of the respective packets were successfully received;

20 means for generating an average signal strength value from the received signal strength measurements;

means for determining a mathematical difference between the average signal strength value and a target value associated with the receiving radio unit; and

25 means for using the mathematical difference as a basis for deciding whether to send a power control message from the receiving radio unit to the sending radio unit.

19. The apparatus of claim 18, wherein the means for using the mathematical difference as a basis for deciding whether to send a power control message from the receiving radio unit to the sending radio unit comprises:

means for sending a power control message from the receiving radio unit to the sending radio unit if the mathematical difference is greater than a first decision boundary; and

5 means for sending the power control message from the receiving radio unit to the sending radio unit if the mathematical difference is less than a second decision boundary.

20. The apparatus of claim 18, wherein the power control message includes the mathematical difference.

21. The apparatus of claim 20, further comprising:
10 means for receiving the power control message in the sending radio unit;
and
means for adjusting a transmission power level in the sending radio unit by an amount based on the mathematical difference.

22. The apparatus of claim 21, wherein the means for adjusting the
15 transmission power level in the sending radio unit by an amount based on the mathematical difference comprises:

means for determining whether the amount based on the mathematical difference would cause an adjusted transmission power level to exceed a predefined maximum transmission power level;
20 means, response to a determination that the amount based on the mathematical difference would cause the adjusted transmission power level to exceed the predefined maximum transmission power level, for adjusting the transmission power level in the sending radio unit to be no more than the predefined maximum transmission power level.

25 23. The apparatus of claim 22, further comprising:
means for sending a control message from the sending radio unit to the receiving radio unit informing that a maximum transmission power level has been reached.

24. The apparatus of claim 23, further comprising:
in the receiving radio unit, means, responsive to the control message
from the sending radio unit informing that a maximum transmission power level has
been reached, for sending no further power control messages to the sending radio unit
5 that instruct the sending radio unit to further increase its transmission power level.
25. The apparatus of claim 21, wherein the means for adjusting the
transmission power level in the sending radio unit by an amount based on the
mathematical difference comprises:
means for determining whether the amount based on the mathematical
10 difference would cause an adjusted transmission power level to fall below a predefined
minimum transmission power level;
means, responsive to a determination that the amount based on the
mathematical difference would cause the adjusted transmission power level to fall
below the predefined minimum transmission power level, for adjusting the transmission
15 power level in the sending radio unit to be no less than the predefined minimum
transmission power level.
26. The apparatus of claim 25, further comprising:
means for sending a control message from the sending radio unit to the
receiving radio unit informing that a minimum transmission power level has been
20 reached.
27. The apparatus of claim 26, further comprising the step of:
in the receiving radio unit, means, responsive to the control message
from the sending radio unit informing that a minimum transmission power level has
been reached, for sending no further power control messages to the sending radio unit
25 that instruct the sending radio unit to further decrease its transmission power level.
28. The apparatus of claim 18, wherein the target value associated with the
receiving radio unit is based on the receiver sensitivity.

29. The apparatus of claim 18, wherein the target value associated with the receiving radio unit is based on the receiver sensitivity adjusted to account for implementation losses and other inaccuracies.

30. The apparatus of claim 18, wherein the means for generating the average
5 signal strength value from the received signal strength measurements comprises:
means for averaging signal strength values from the received signal strength measurements over a period of time extending over at least two frequency hops.

31. The apparatus of claim 18, further comprising:
10 means, responsive to a decision to send the power control message from the receiving radio unit to the sending radio unit, for sending the power control message on a control channel established between the receiving radio unit and the sending radio unit.

32. The apparatus of claim 18, further comprising:
15 means, responsive to a decision to send the power control message from the receiving radio unit to the sending radio unit, for including the power control message in a return packet that is transmitted from the receiving radio unit to the sending radio unit.

33. The apparatus of claim 18, further comprising:
20 means, responsive to a decision to send the power control message from the receiving radio unit to the sending radio unit, for always using a highest permissible transmit power level to send the power control message from the receiving radio unit to the sending radio unit.

34. The apparatus of claim 18, further comprising:
25 means, responsive to a decision to send the power control message from the receiving radio unit to the sending radio unit, for initially using a first transmit power level to send the power control message from the receiving radio unit to the

sending radio unit, and then gradually increasing the power control message transmit power level from the first transmit power level to successively higher levels until a reception signal strength level at the receiving radio unit has reached a predefined acceptable level.

FIG. 1

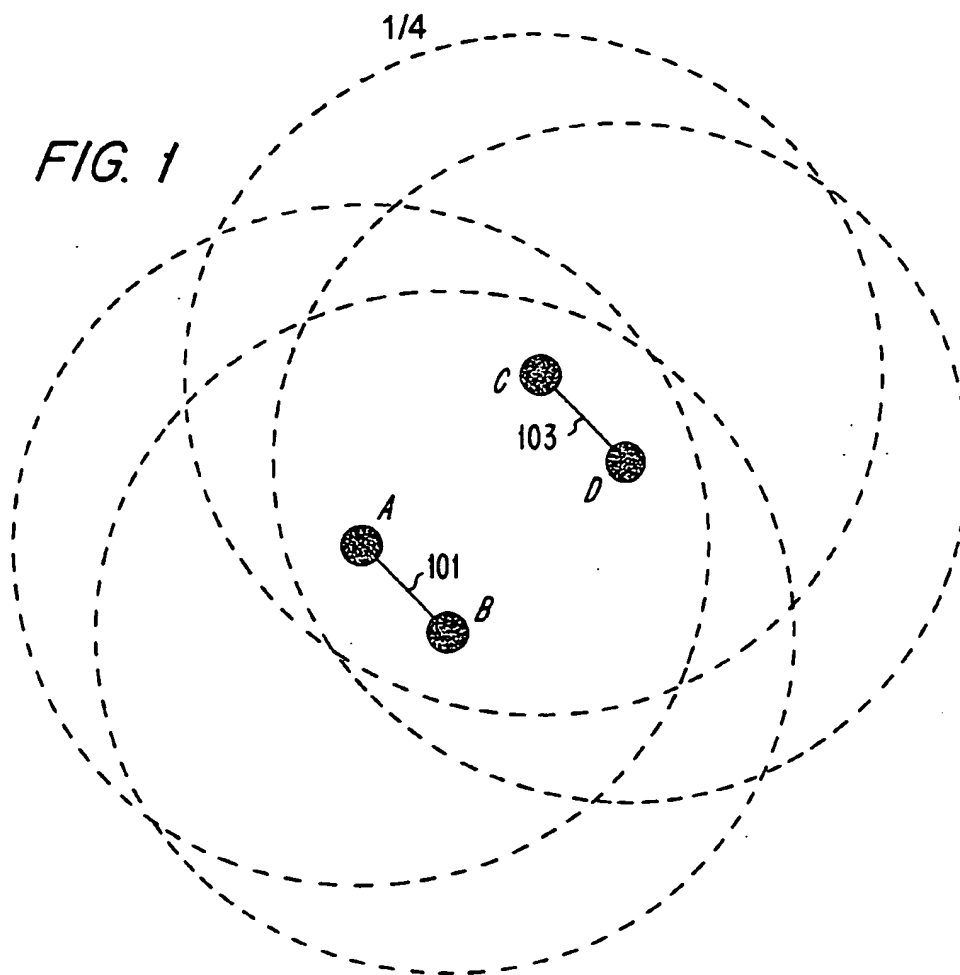


FIG. 2

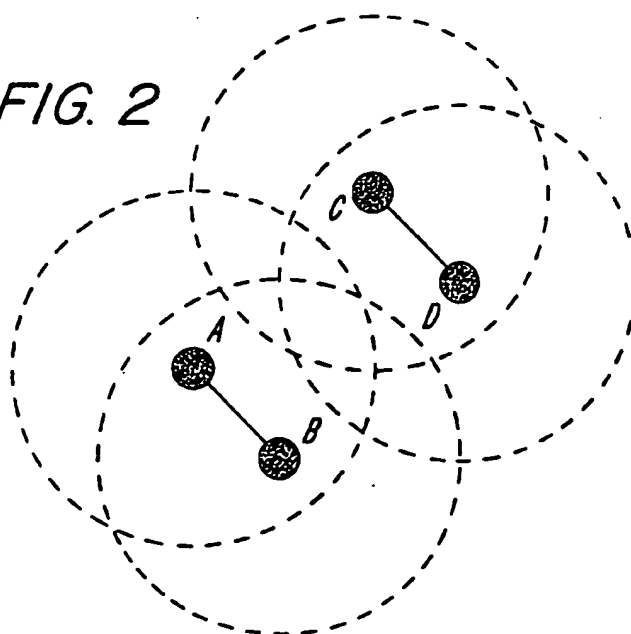


FIG. 3

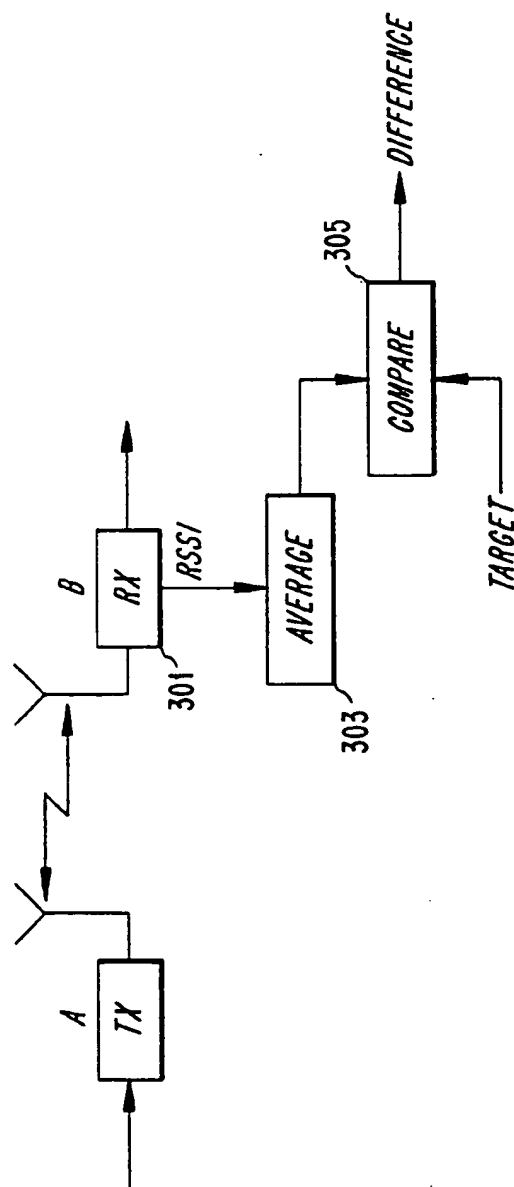


FIG. 4


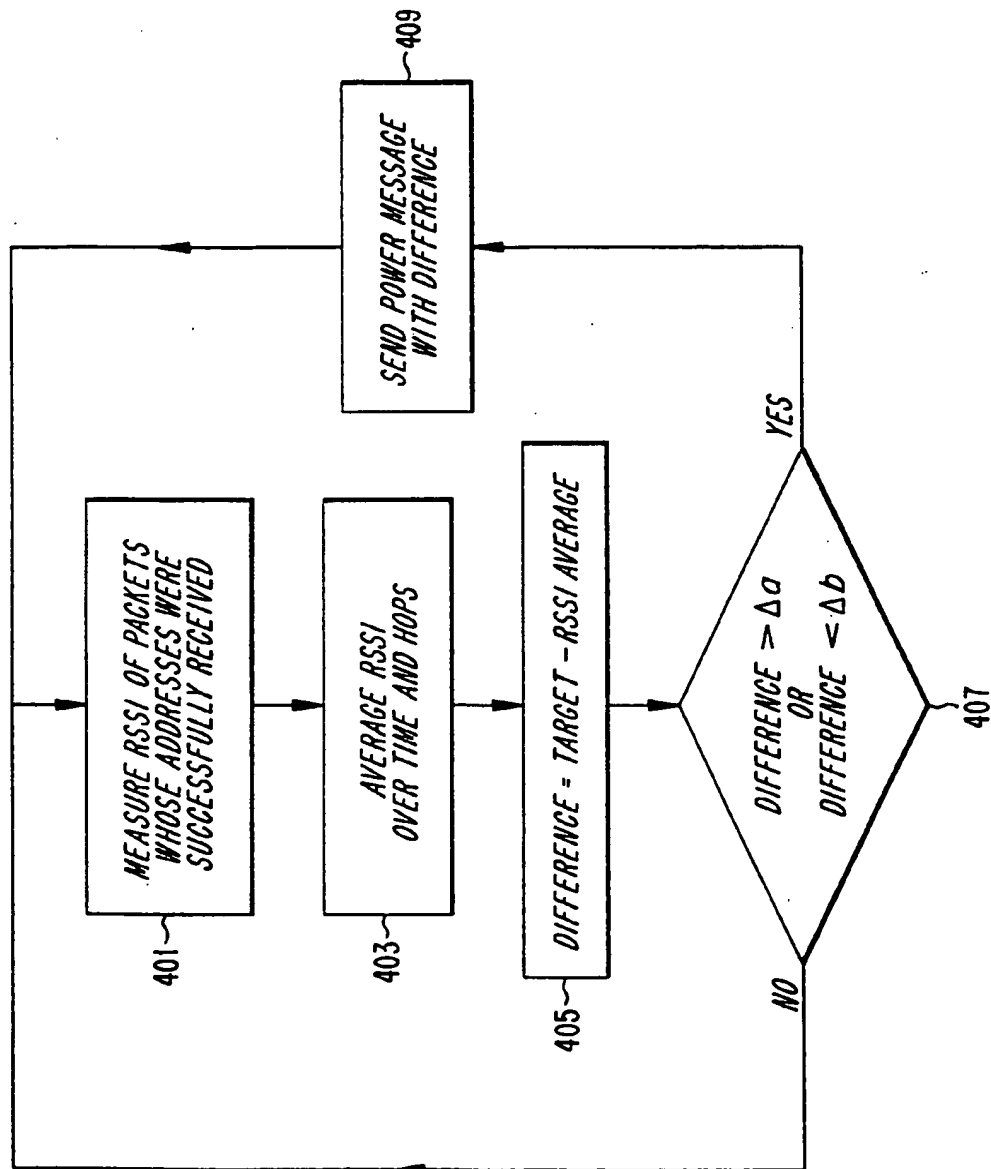


FIG. 5

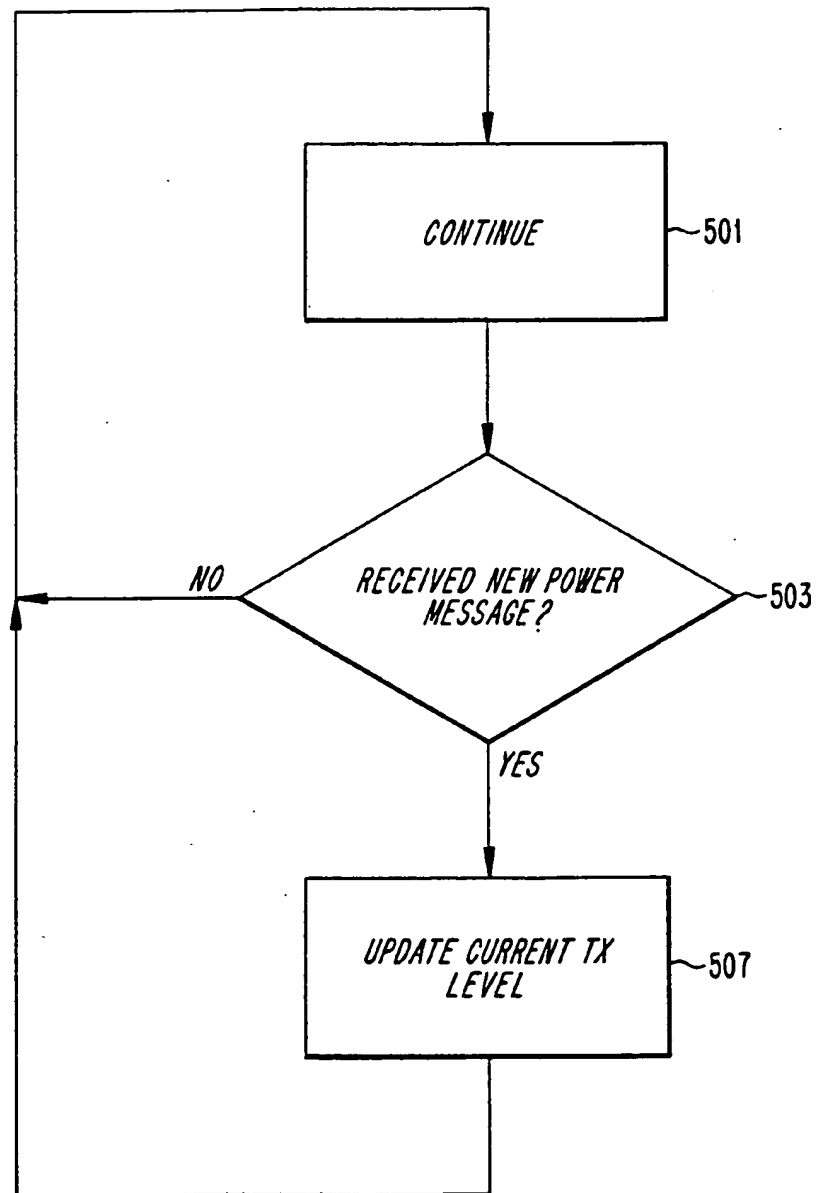

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 99/01607

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 H04B7/005		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 H04B H04L		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 465 398 A (FLAMMER GEORGE H) 7 November 1995 (1995-11-07) cited in the application figure 4 column 4, line 38 -column 5, line 5 ---	1-34
A	US 5 574 979 A (WEST GUY J) 12 November 1996 (1996-11-12) figures 14,35,36 column 30, line 37 - line 46 column 54, line 1 -column 55, line 49 ---	1-34
A	EP 0 548 939 A (NIPPON ELECTRIC CO) 30 June 1993 (1993-06-30) figure 2 column 7, line 7 - line 39 ---	1-34
-/--		
<div style="display: flex; justify-content: space-between;"> <input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex. </div>		
<div style="display: flex;"> <div style="flex: 1;"> <p>* Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search <div style="text-align: center; font-weight: bold;">2 February 2000</div>		Date of mailing of the international search report <div style="text-align: center; font-weight: bold;">09/02/2000</div>
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer <div style="text-align: center; font-weight: bold;">Eraso Helguera, J</div>

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/SE 99/01607

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 462 952 A (ERICSSON TELEFON AB L M) 27 December 1991 (1991-12-27) figure 4 column 6, line 6 -column 11, line 7 ----	1-34
A	US 5 579 373 A (JANG BU-KWAN) 26 November 1996 (1996-11-26) figures 7,8 column 8, line 37 -column 9, line 11 -----	1-34

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/SE 99/01607

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5465398 A	07-11-1995	AU 7962694 A CA 2173250 A CN 1132578 A EP 0722635 A WO 9510142 A	01-05-1995 13-04-1995 02-10-1996 24-07-1996 13-04-1995
US 5574979 A	12-11-1996	NONE	
EP 0548939 A	30-06-1993	JP 2823034 B JP 5244056 A US 5386589 A	11-11-1998 21-09-1993 31-01-1995
EP 0462952 A	27-12-1991	SE 467332 B AT 121242 T AU 635429 B AU 7917391 A CA 2045211 A CN 1057557 A, B DE 69108793 D DE 69108793 T DK 462952 T ES 2073728 T HK 108795 A JP 4233334 A KR 9606142 B NZ 238269 A SE 9002228 A US 5241690 A	29-06-1992 15-04-1995 18-03-1993 02-01-1992 22-12-1991 01-01-1992 18-05-1995 24-08-1995 14-08-1995 16-08-1995 14-07-1995 21-08-1992 09-05-1996 26-10-1993 22-12-1991 31-08-1993
US 5579373 A	26-11-1996	KR 9600147 B	03-01-1996